

Installation and Operational Guide


Please read the manual below for important information on your Viviox product that could prevent damage or serious injury. Failure to follow our instructions and other safety precautions could result in serious injury to you or your passengers, and/or product and vehicle damage.

Important: The installation technician and operator must read this manual before starting installation or operation of your new product. They must have a thorough understanding of automotive systems, electronics and procedures.

WARNING: Please understand that the user and installer assume ultimate, complete and full responsibility in determining proper mounting location and positioning. When installing, consider a location based on its ability to provide total safety to all passengers.

WARNING: DO NOT USE CIRCUIT BREAKERS WITH THIS PRODUCT! All customer-supplied wires that connect with the positive (+) end of the battery must be able to support 125% or more of the maximum operating current. They MUST be fused with the battery to handle the current.

- Before drilling and installation, check both sides of your mounting service.
- Grommets should be installed into all wire passage holes.
- Please read your vehicle's owner's manual; it contains important information about the airbag deployment area. This product should NOT, under any circumstances, be installed in the deployment area of the vehicle's airbag. Do NOT route any wires in this area. Having equipment mounted or located in this area is a serious risk; it could reduce or damage the airbag's effectiveness, or even become a projectile that could result in serious injury or death.
- This device may feature powerful, bright, high-intensity LED lights. DO NOT look at the lights directly, as momentary blindness and/or permanent eye damage can occur.
- DO NOT try to activate or control this product during a hazardous or dangerous driving situation.
- If your device is controlled or activated by a remote, please double check that the control is in a place that will allow for both the control itself, as well as the vehicle, to be used safely in any driving condition and/or situation.

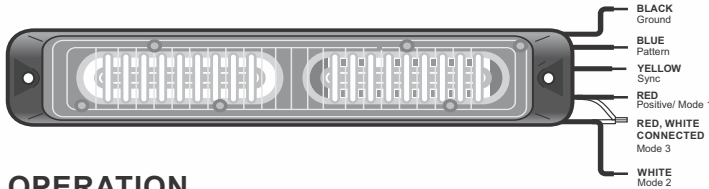

OPERATION

1. Mode Operation

- Red Wire - Apply power to activate color 1
- White wire - Apply power to activate color 2
- Apply power to both wires to activate color 1

2. Changing Patterns: Patterns can be changed by momentarily connecting the blue wire to the ground of your vehicle's battery.

Less than a second	Next Pattern
1-3 Seconds	Previous Pattern
3-5 Seconds	Factory Default
5+ Seconds	Turn off and Reset

3. Syncing Instructions: Configure both edge light heads to the same pattern in either mode and connect the yellow wires from each light head together.

4. Alternating Light Heads: Set every other light to the same pattern in Phase 2 and connect the yellow wires. To better understand how this feature works, each light head coming from the factory will display Phase 1. In order to have one edge light head alternate with another, every other light needs to be advanced to the current pattern's Phase 2.

SURFACE MOUNTING

1. Place the unit against the mounting surface.
2. Mark the areas where the mounting holes are to be drilled. Confirm that no vehicle parts could be damaged by the drilling process.
3. Using a bit sized for a #6 sheet metal screw, drill two mounting holes and a 0.4" dia. wire passage hole(s) must also be drilled.
4. Route the wires through the hole(s) in the gasket and through the wire passage hole(s) in the mounting surface. Secure the light-head to the mounting surface using the screws provided.

SPECIFICATIONS

Dimensions: 5 1/16" L x 11/16" D x 7/8" H

Input Voltage: 10-30VDC

Input Current:
12V - 2.0A (MAX)
24V - 1.2A (MAX)

FLASH PATTERNS

<p>Single 75 Ph1 Color 1 Synchronous Color 3 Single 75 Ph2 Color 1 Synchronous Color 3 Single 75 Ph1 Color 1 Alternately Color 3 Single 75 Ph2 Color 1 Alternately Color 3 Single 75 Ph1 Color 2 Synchronous Color 4 Single 75 Ph2 Color 2 Synchronous Color 4 Single 75 Ph1 Color 2 Alternately Color 4 Single 75 Ph2 Color 2 Alternately Color 4 Single 75 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4) Single 75 (Color 1 Synchronous Color 4) Alternately (Color 2 Synchronous Color 3) Single 75 (Color 1 Alternately Color 2) Alternately (Color 3 Alternately Color 4) Single 375 Ph1 Color 1 Synchronous Color 3 Single 375 Ph2 Color 1 Synchronous Color 3 Single 375 Ph1 Color 1 Alternately Color 3 Single 375 Ph2 Color 1 Alternately Color 3 Single 375 Ph1 Color 2 Synchronous Color 4 Single 375 Ph2 Color 2 Synchronous Color 4 Single 375 Ph1 Color 2 Alternately Color 4 Single 375 Ph2 Color 2 Alternately Color 4 Single 375 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4) Single 375 (Color 1 Synchronous Color 4) Alternately (Color 2 Synchronous Color 3) Single 375 (Color 1 Alternately Color 2) Alternately (Color 3 Alternately Color 4) Double 75 Ph1 Color 1 Synchronous Color 3 Double 75 Ph2 Color 1 Synchronous Color 3 Double 75 Ph1 Color 1 Alternately Color 3 Double 75 Ph2 Color 1 Alternately Color 3 Double 75 Ph1 Color 2 Synchronous Color 4 Double 75 Ph2 Color 2 Synchronous Color 4 Double 75 Ph1 Color 2 Alternately Color 4 Double 75 Ph2 Color 2 Alternately Color 4 Double 75 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4) Double 75 (Color 1 Synchronous Color 4) Alternately (Color 2 Synchronous Color 3) Double 75 (Color 1 Alternately Color 2) Alternately (Color 3 Alternately Color 4) Double 120 Ph1 Color 1 Synchronous Color 3 Double 120 Ph2 Color 1 Synchronous Color 3 Double 120 Ph1 Color 1 Alternately Color 3 Double 120 Ph2 Color 1 Alternately Color 3 Double 120 Ph1 Color 2 Synchronous Color 4 Double 120 Ph2 Color 2 Synchronous Color 4 Double 120 Ph1 Color 2 Alternately Color 4 Double 120 Ph2 Color 2 Alternately Color 4 Double 120 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4) Double 120 (Color 1 Synchronous Color 4) Alternately (Color 2 Synchronous Color 3) Double 120 (Color 1 Alternately Color 2) Alternately (Color 3 Alternately Color 4) Double 120 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4) Double 120 (Color 1 Synchronous Color 4) Alternately (Color 2 Synchronous Color 3) Double 120 (Color 1 Alternately Color 2) Alternately (Color 3 Alternately Color 4)</p>	<p>Triple 75 Ph1 Color 1 Synchronous Color 3 Triple 75 Ph2 Color 1 Synchronous Color 3 Triple 75 Ph1 Color 1 Alternately Color 3 Triple 75 Ph2 Color 1 Alternately Color 3 Triple 75 Ph1 Color 2 Synchronous Color 4 Triple 75 Ph2 Color 2 Synchronous Color 4 Triple 75 Ph1 Color 2 Alternately Color 4 Triple 75 Ph2 Color 2 Alternately Color 4 Triple 75 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4) Triple 75 (Color 1 Synchronous Color 4) Alternately (Color 2 Synchronous Color 3) Triple 75 (Color 1 Alternately Color 2) Alternately (Color 3 Alternately Color 4) Quad 75 Ph1 Color 1 Synchronous Color 3 Quad 75 Ph2 Color 1 Synchronous Color 3 Quad 75 Ph1 Color 1 Alternately Color 3 Quad 75 Ph2 Color 1 Alternately Color 3 Quad 75 Ph1 Color 2 Synchronous Color 4 Quad 75 Ph2 Color 2 Synchronous Color 4 Quad 75 Ph1 Color 2 Alternately Color 4 Quad 75 Ph2 Color 2 Alternately Color 4 Quad 75 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4) Quad 75 (Color 1 Synchronous Color 4) Alternately (Color 2 Synchronous Color 3) Quad 75 (Color 1 Alternately Color 2) Alternately (Color 3 Alternately Color 4) Quad 120 Ph1 Color 1 Synchronous Color 3 Quad 120 Ph2 Color 1 Synchronous Color 3 Quad 120 Ph1 Color 1 Alternately Color 3 Quad 120 Ph2 Color 1 Alternately Color 3 Quad 120 Ph1 Color 2 Synchronous Color 4 Quad 120 Ph2 Color 2 Synchronous Color 4 Quad 120 Ph1 Color 2 Alternately Color 4 Quad 120 Ph2 Color 2 Alternately Color 4 Quad 120 (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4) Quad 120 (Color 1 Synchronous Color 4) Alternately (Color 2 Synchronous Color 3) Quad 120 (Color 1 Alternately Color 2) Alternately (Color 3 Alternately Color 4) Modulation (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4) 2 Double, 2 Quad (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4) 4 Single, 2 Triple (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4) 1 Double, 1 Triple, 1 Quad (Color 1 Synchronous Color 3) Alternately (Color 2 Synchronous Color 4) OFF</p>
---	---